



# WELDPLAST S2



## Agile extruder

The WELDPLAST S2 extruder processes materials such as HDPE and PP at a high output volume. Thanks to its design, this extruder is particularly nimble when deployed and facilitates versatile, safe plastic welding.



Digital display



Various ways to hold



Welding shoe assembly

## WELDPLAST S2


- Perfect weld quality
- Multifunctional display
- Low-maintenance blower
- Agile
- Safe

### Technical data

Voltage	200 V; 230 V	
Frequency	50/60 Hz	
Power	2400-3000 W	
Welding rod	ø 3-4 mm / 0.12-0.16 in	
Material output ø 3 mm	0.6-1.3 kg/h	1.32-2.86 lb/h
Material output ø 4 mm	1-2 kg/h	2.2-4.4 lb/h
Welding materials	HDPE; LDPE; LLDPE; PP	
Air guide	Internal	
Screw heating	Coil heater	
Air temperature control	Closed loop	
LQS	No	
Display	Yes	
Brushless blower motor	Yes	
Brushless drive motor	No	
LED Working light	No	
Length	450.0 mm	17.71 in
Width	98.0 mm	3.85 in
Height	260.0 mm	10.23 in
Weight	5.8 kg	12.78 lb
Power cable length	5.0 m	16.4 ft
Noise emission level	78 dB (A)	
Approvals	CE; KC; UKCA	
Protection class	I	
Country of origin	CH	

### Product items

WELDPLAST S2, 230V/3000W, EU plug	127.215
WELDPLAST S2, 230V/3000W, CN plug	140.707
WELDPLAST S2, 200V/2400W, w/o plug	146.341
WELDPLAST S2, 230V/3000W, CEE 3/16	156.131
WELDPLAST S2, 230V/3000W, CH plug	176.839

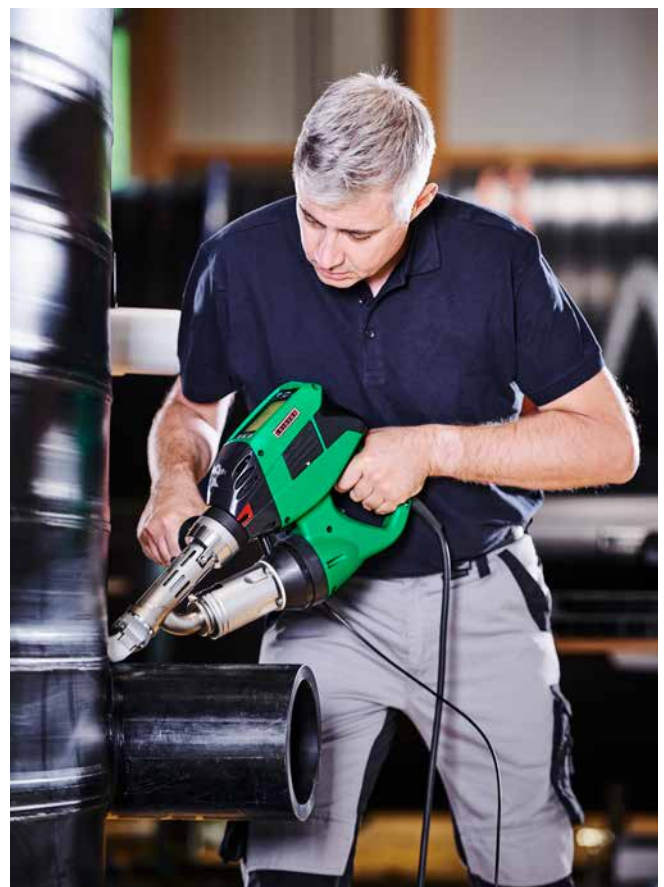

Configure  
WELDPLAST S2

leister.com